

Organizr LDAP Setup (Authentik)

Support level: Community

What is organizr

“Organizr allows you to setup "Tabs" that will be loaded all in one webpage.

-- <https://github.com/causefx/Organizr>

This integration leverages authentik's LDAP for the identity provider to achieve an SSO experience. See [ldap provider generic setup](#) for setting up the LDAP provider.

Preparation

The following placeholders will be used:

- `organizr.company` is the FQDN of the Service install.
- `authentik.company` is the FQDN of the authentik install.

Create a new user account (*or reuse an existing*) for organizr to use for LDAP bind under *Directory - > Users -> Create*, in this example called `ldapservice`.


Note the DN of this user will be `cn=ldapservice,ou=users,dc=ldap,dc=goauthentik,dc=io`

Optionally, create a new group like `organizr users` to scope access to the organizr application.

Authentik Configuration


1. Create a new Proxy Provider for `https://organizr.company`

Image not found or type unknown

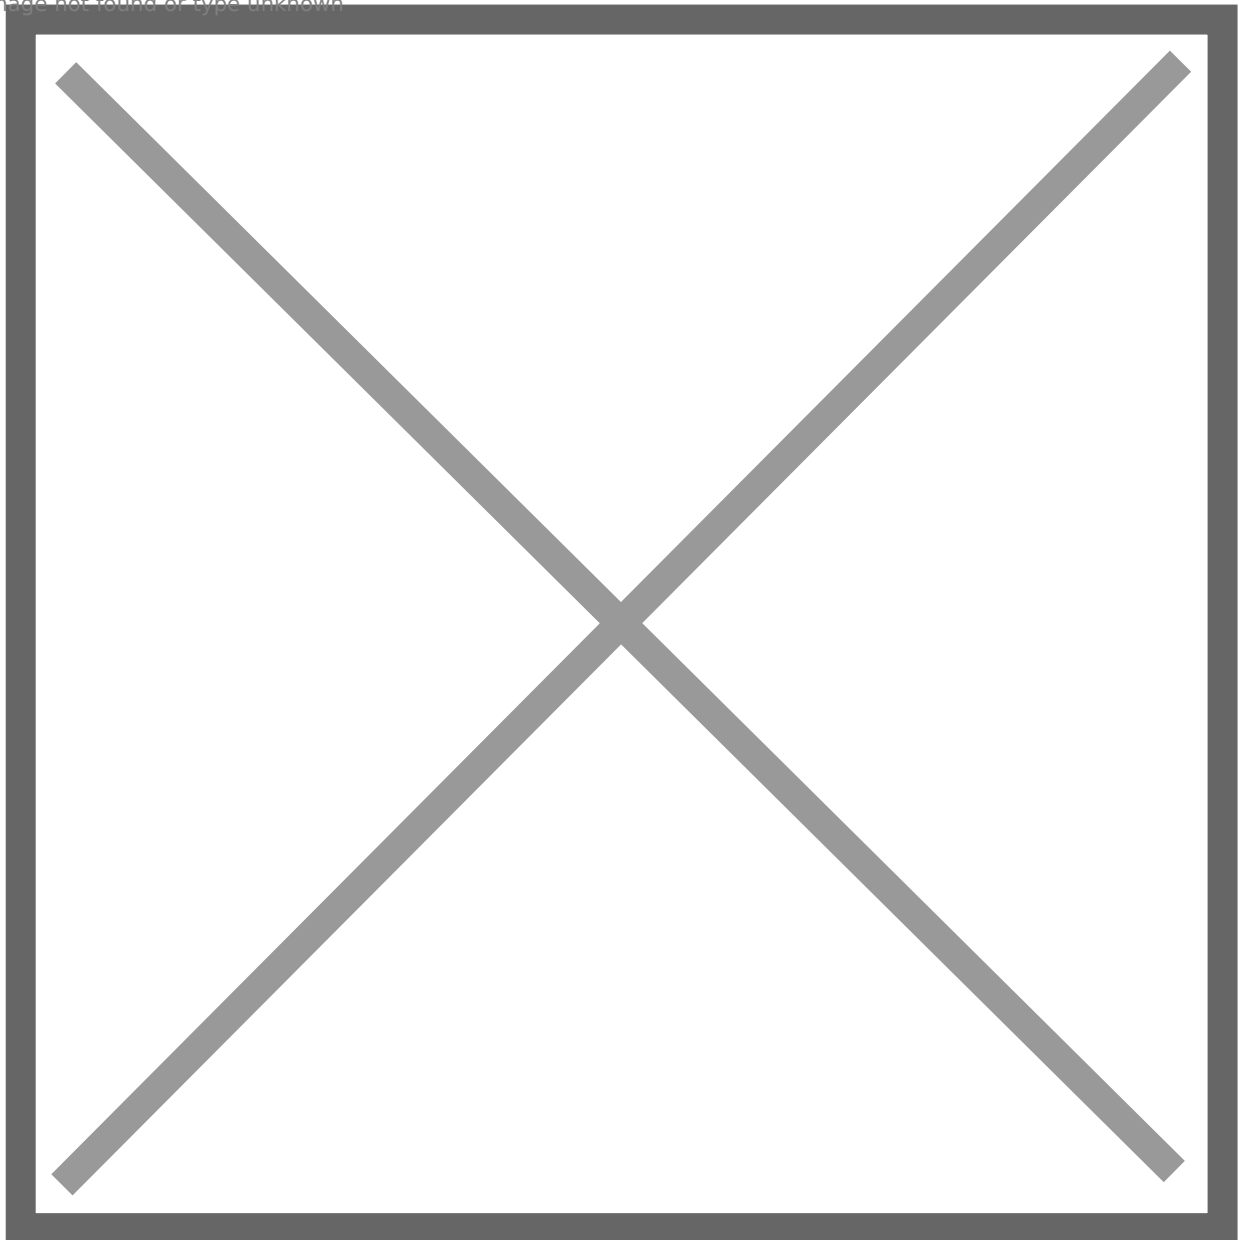


Optionally, add the regular expression to allow api calls in the advanced protocol settings.

Image not found or type unknown

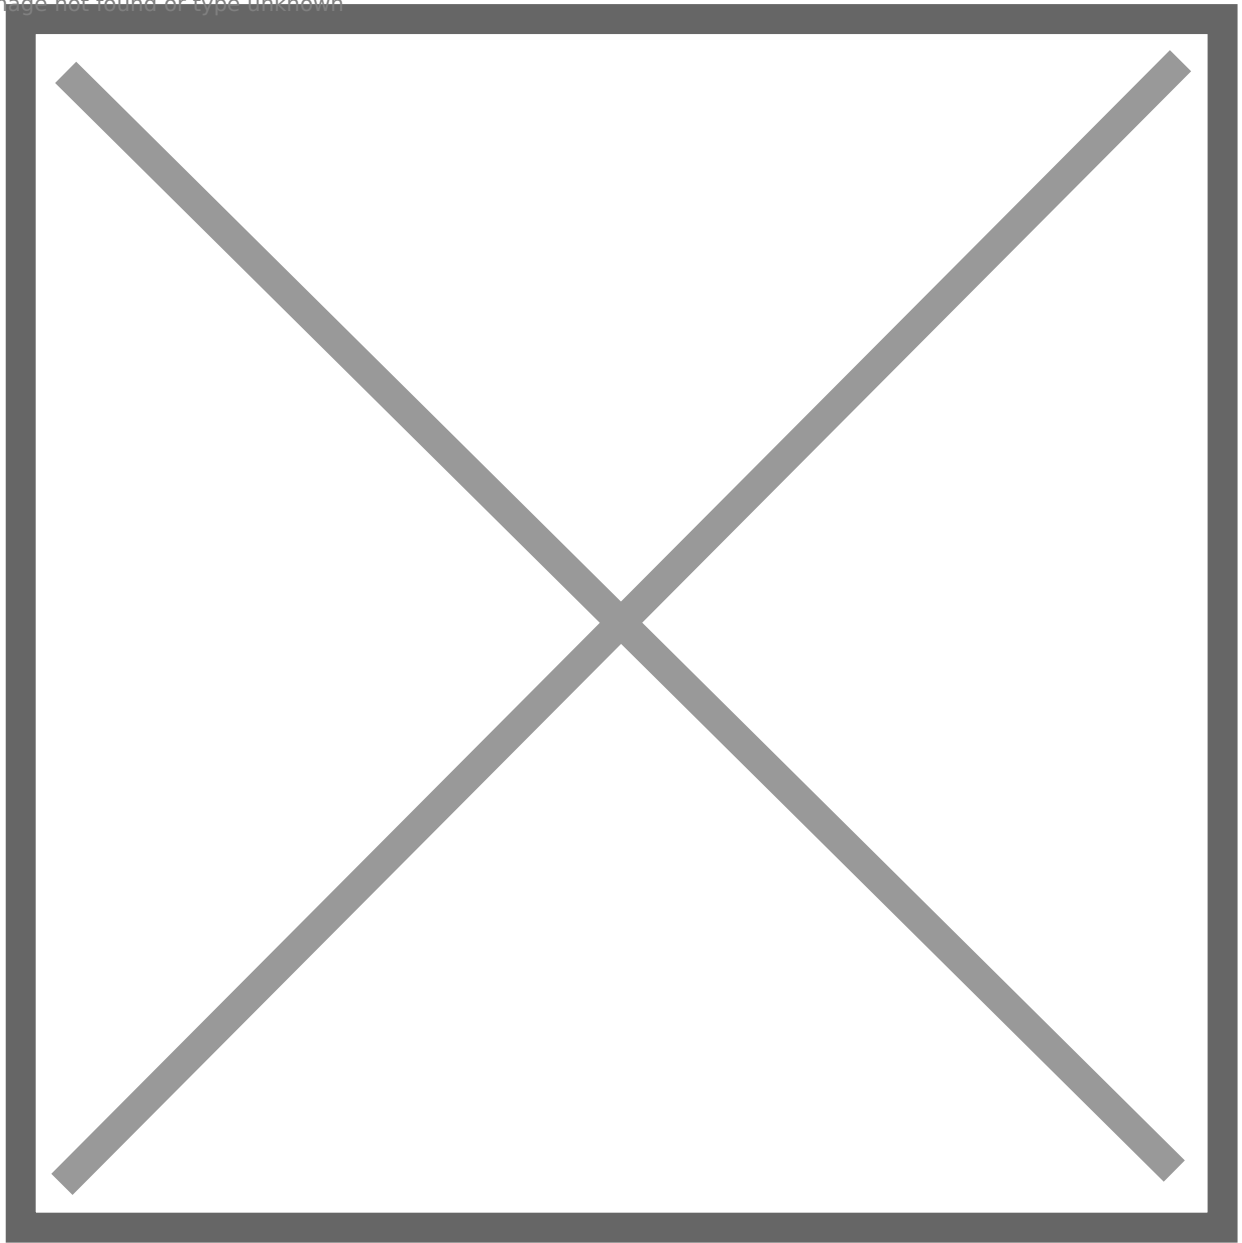

2. Create a new Application for the `https://organizr.company` Provider.

Image not found or type unknown

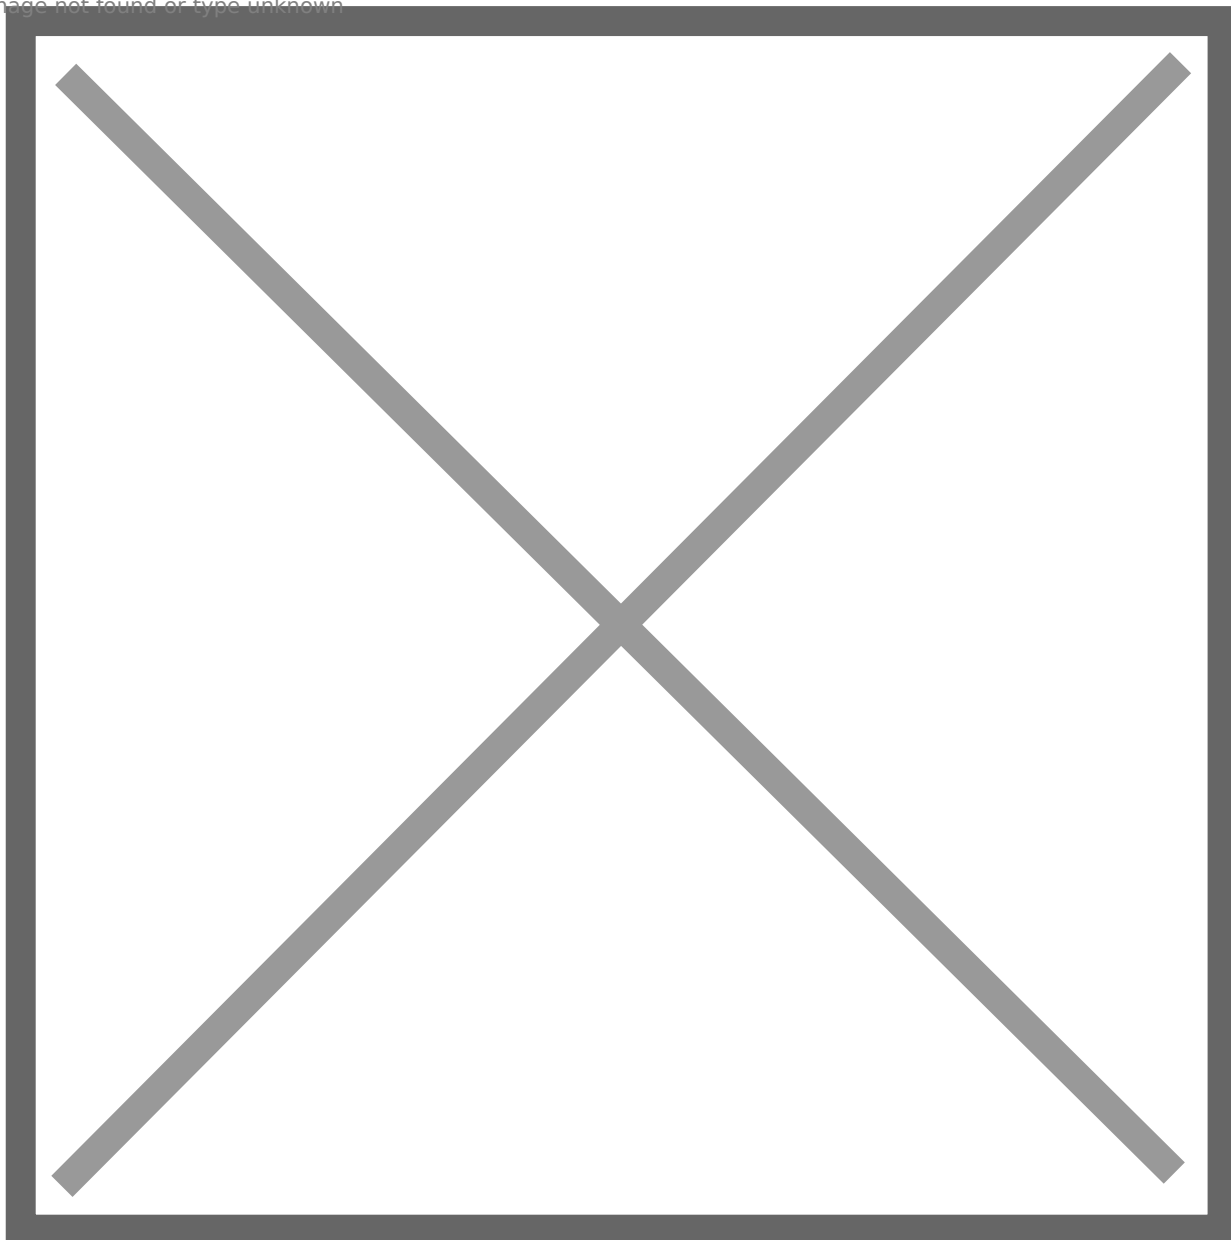

TIP

Optionally, bind the group to control access to the organizer to the application.

Image not found or type unknown

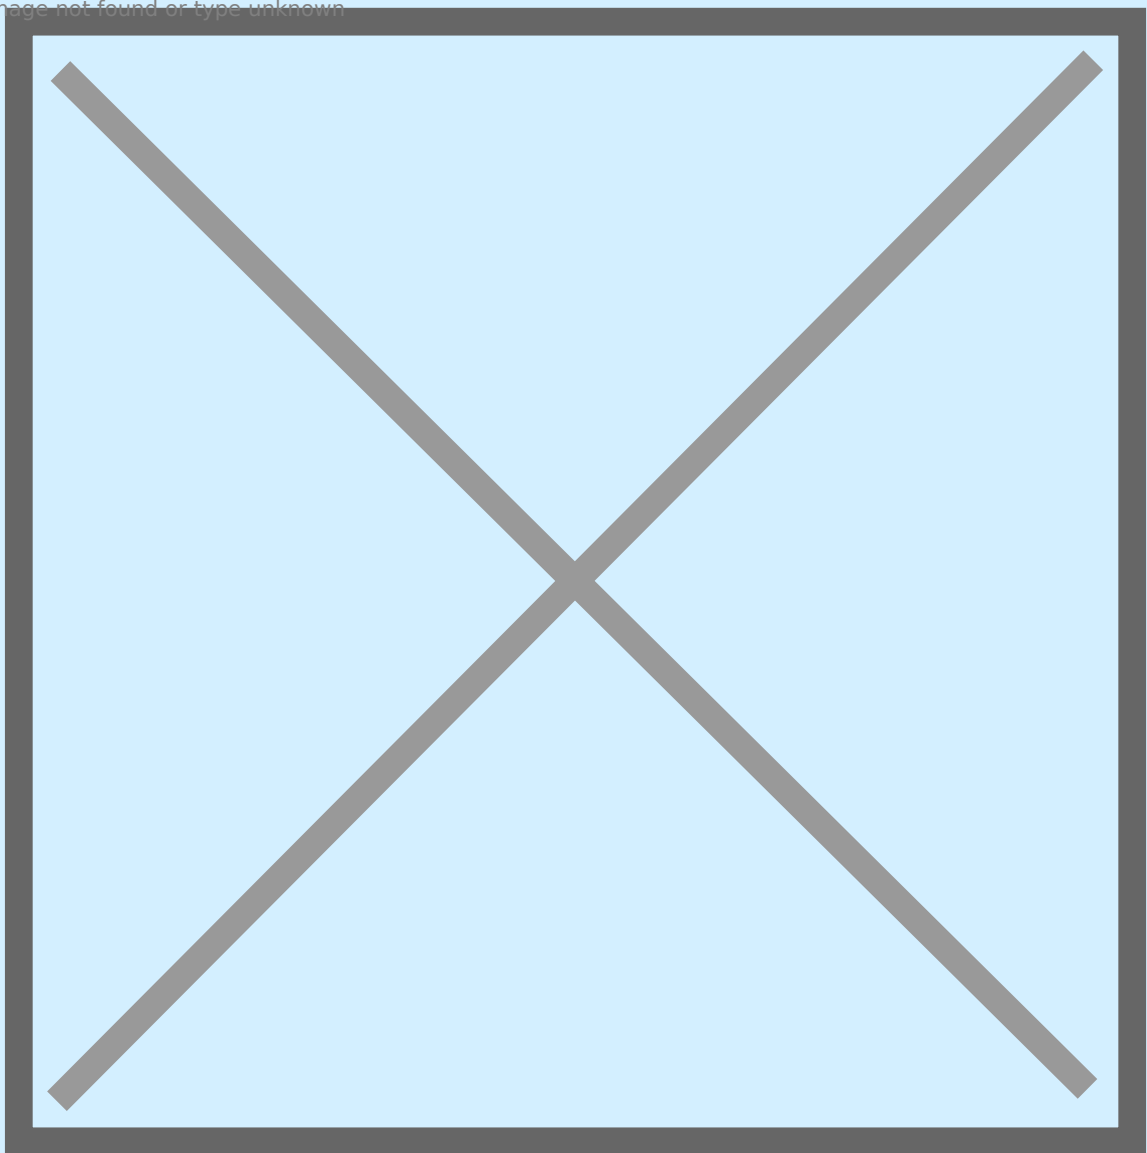


Image not found or type unknown



::: 3. Add the Application to the authentik Embedded Outpost.


organizr Configuration

CAUTION

Ensure any local usernames/email addresses in organizr do not conflict with usernames/email addresses in authentik.

1. Enable Auth Proxy in organizr *system settings* -> *main* -> *Auth Proxy*

Auth Proxy Header Name: Auth Proxy Whitelist: *your network subnet in CIDR notation IE* Auth Proxy Header Name for Email: Logout URL:
Image not found or type unknown

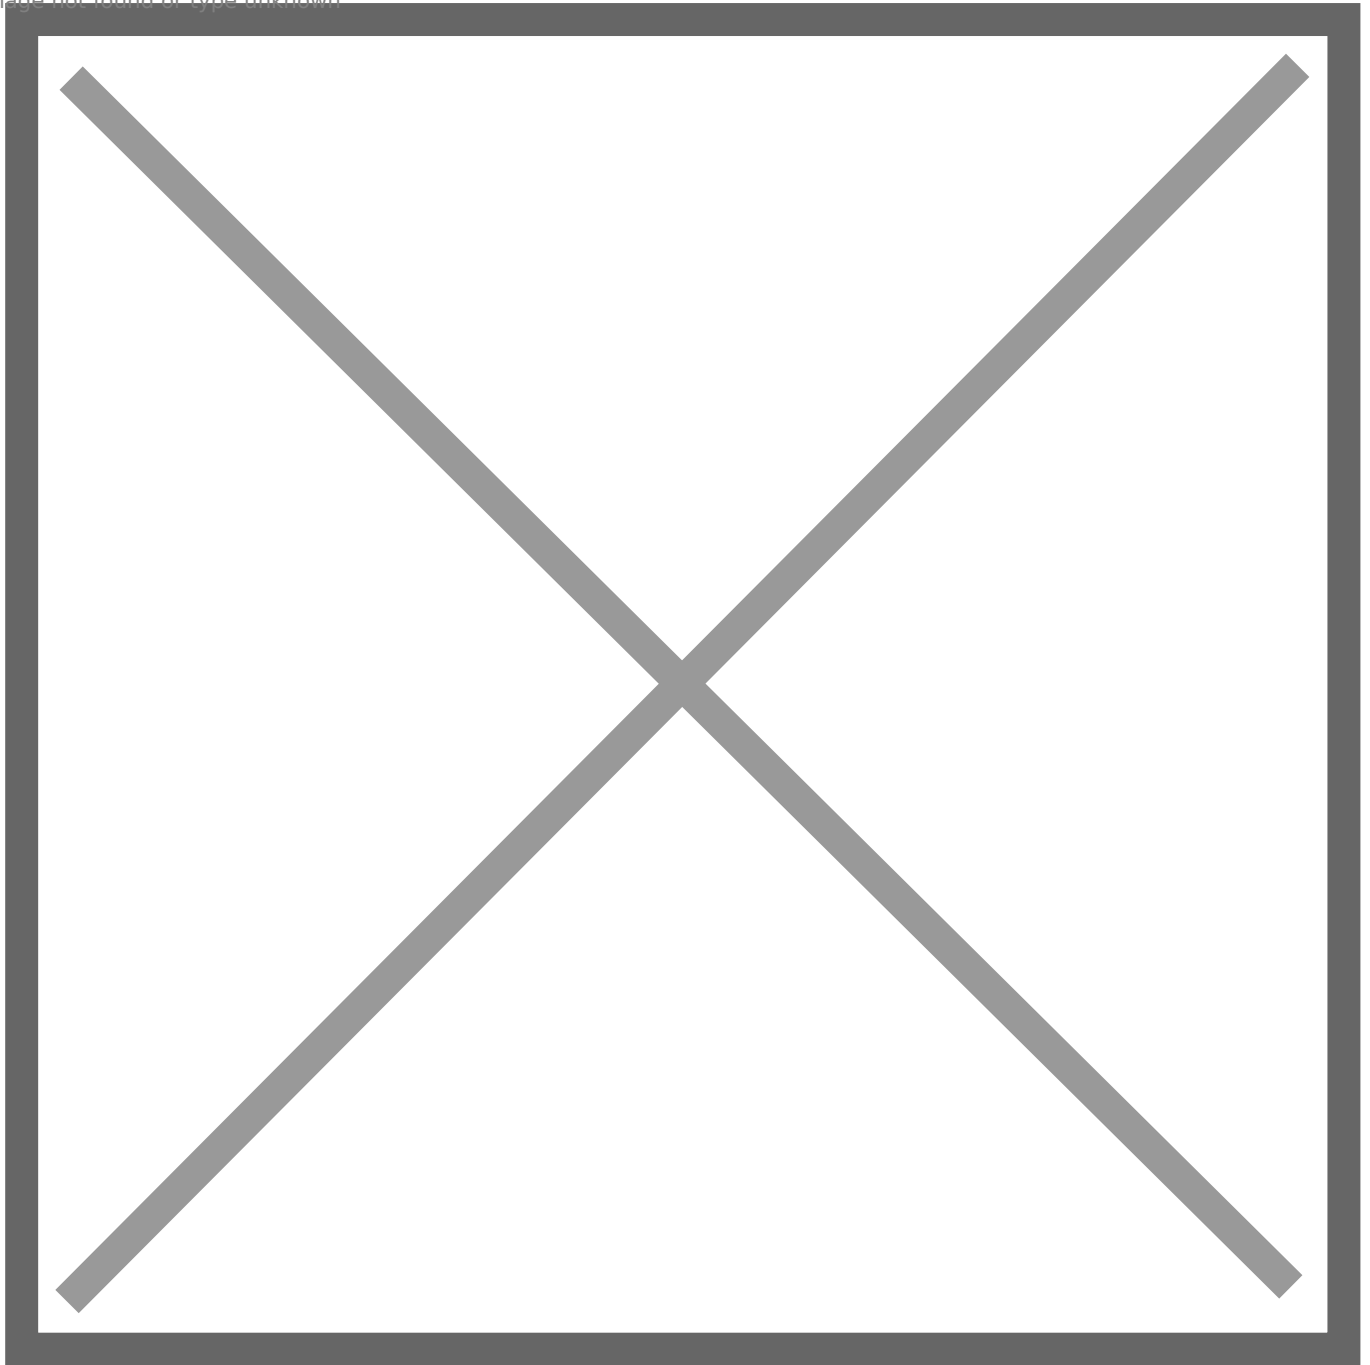

2. Setup Authentication in organizr *system settings -> main -> Authentication*

Authentication Type: Authentication Backend: Host Address:
Host Base DN: Account Prefix: Account Suffix: Bind Username: Bind Password:
LDAP Backend Type:

Image not found or type unknown



INFO

Access for authentik users is managed locally within organizr under *User Management*. By default, new users are assigned the `User` group.

TIP

Consider front-ending your application with a [forward auth provider](#) for an SSO experience.

Revision #5

Created 21 January 2024 02:43:58 by joliveira

Updated 21 January 2024 19:23:06 by joliveira